

Säurekitt S50 HF

50

		Steuler-Säurenkitt S 50 HF	
Steuler-Säurenkitt S 50 HF .		350).	(.
		Silica MH:	-
Steuler-Säurenkitt S 50 HF		S 50 HF	25
Steuler-Säurenkitt S 50 HF.		:	
	28	0,48 - Silica MH	1
	20	1,52 - S 50 HF	3,2
	2,0 / 3		
	49	S 50 HF	9
	13,5	20 : Silica MH	5 ()
	0,4	35	-
DIN 52108		10	-
	1,2 W/		
	12 10 ⁻⁵ -1		
	8000		
	×1,5	82,	
	1,0 %		
	10 %	Silica MH	
	5		
(20)		Silica MH	
	35		
(20)			
	900		

20 : 25

8

FURADUR,
с

5

7

OXYDUR

5

)
70%

30%

(30%)

)
80%

20%

(96%)


5 : 10 48,0
24

8

(OXIDUR FURADUR⁵)

5

«
28

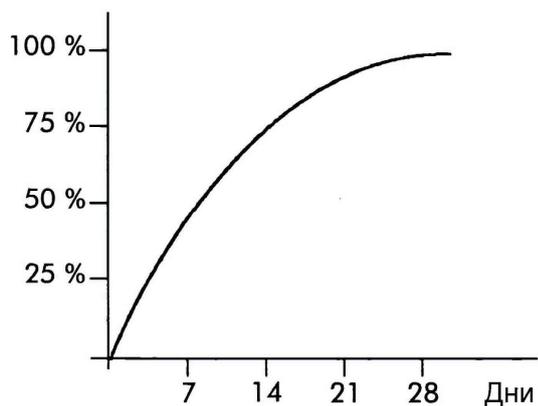

28