



2.2

2.3

2.4



2.5

12944

4)


SA 2 1/2 DIN

60μ


30μ

2.6

.5

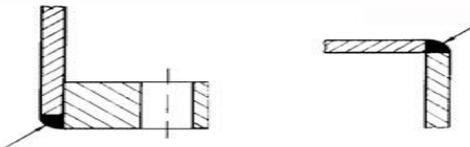

.5



3.0

3.1

3.1.1

3000

3

100°

25

30

3.1.1

3000


10

200°


30 50

3.2

3.2.1



3.2.2



3.2.3

900 1500 ±5




0.4% 15

3.2.4

3.3

3.4

3.4.1

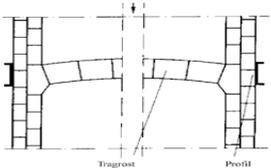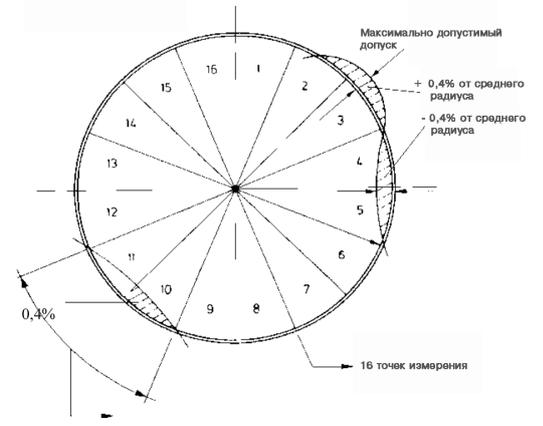

$\pm 0,4\%$   
1/16


1 + 25 + 16  
16  
1000 2500  
10

3.4.2

< 0,1

3.4.3

023.

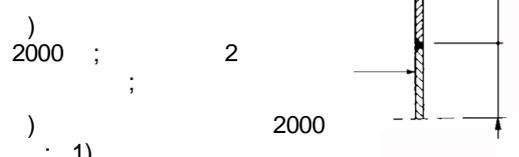

4.0

4.1

2500

$\pm 0,4\%$ ;  
7500, max  $\pm 15$

5.0

U 16

5.1

1500  
1/16  
7500

$\pm 5$   
900 1500

5.2



B= 0,9 1,5

900  $\frac{+5}{1500}$

5.3

022.

b = 0,9 1,5

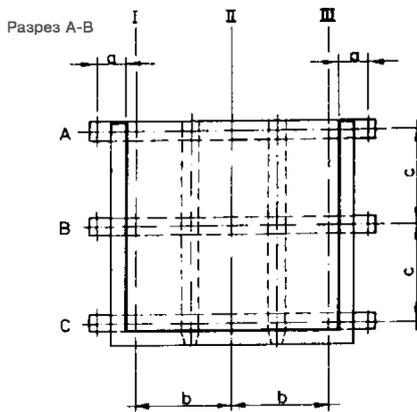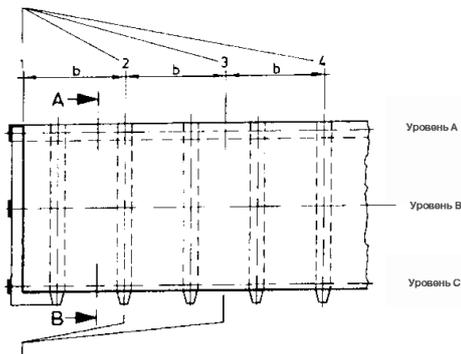

= 0,9 1,5 ; 2 ;

